
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| sources  |                   |                                  |  |              |
|--|-------------------|----------------------------------|--|--------------|
| Supplier's name  | e or trade mark:  | Northern                         |  |              |
| Supplier's addre   | ess: Northern, By | gdøy alle 68, 0265 (             | OSLO, NO   |              |
| Model identifie  | r: Glint wall     |                                  |  |              |
| Type of light so   | urce:             |                                  |  |              |
| Lighting technol   | logy used:        | LED                              | Non-directional or directional:  | NDLS         |
| Light source cap<br>(or other electri  |                   | Glass shade and acrylic difisior |  |              |
| Mains or non-m   | ains:             | MLS                              | Connected light source (CLS):  | No           |
| Colour-tuneable  | e light source:   | No                               | Envelope:  | -            |
| High luminance light source:   |                   | No                               |  |              |
| Anti-glare shield:   |                   | Yes                              | Dimmable:  | Yes          |
|  |                   | Product para                     | T  | T            |
| Parameter  |                   | Value                            | Parameter  | Value        |
|  |                   | General product p                | T  | T            |
| Energy consumption in on-<br>mode (kWh/1000 h), rounded<br>up to the nearest integer   |                   | 8                                | Energy efficiency class  | E            |
| Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |                   | 829 in<br>Sphere (360°)          | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700        |
| On-mode power (P <sub>on</sub> ), expressed in W   |                   | 7,3                              | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,10         |
| Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal                                |                   | -                                | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 91           |
| Outer dimen-   | Height            | 8                                | Spectral power dis-  | See image    |
| sions without<br>separate con-<br>trol gear, light-<br>ing control   | Width<br>Depth    | 47<br>51                         | tribution in the range 250 nm to 800 nm, at full-load  | in last page |

| parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre)                                |                         |  |       |
|---|-------------------------|--|-------|
| Claim of equivalent power   | (a) _                   | If yes, equivalent power (W)           | -     |
|   |                         | Chromaticity coordi-                   | 0,461 |
|   |                         | nates (x and y)                        | 0,411 |
| Parameters for LED and O  | LED light sources:      | ,                                      |       |
| R9 colour rendering index   | value 67                | Survival factor                        | 0,90  |
| the lumen maintenance fa  | ctor 0,92               |  |       |
| Parameters for LED and O  | LED mains light sources | :                                      |       |
| displacement factor (cos ¢  | 0,00                    | Colour consistency in McAdam ellipses  | 0     |
| Claims that an LED light so replaces a fluorescent source without integrated last of a particular wattage | light<br>I bal-         | If yes then replace-<br>ment claim (W) | -     |
| Flicker metric (Pst LM)   | 0,2                     | Stroboscopic effect metric (SVM)       | 0,0   |

(a)'-': not applicable; (b)'-': not applicable;

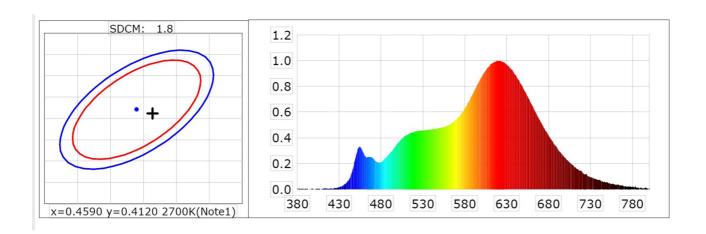

Model placed on the Union market from 16/06/2025



EPREL registration number: 2303072 https://eprel.ec.europa.eu/qr/23

03072

Supplier: Northern.no AS (Manufacturer) Website: www.northern.no

**Customer care service:** 

Name: Northern Website: https://northern.no/no/

Email: post@northern.no Phone: +47 40 00 70 37

**Address:** 

Bygdøy alle 68 0265 OSLO Norway