

MINIPIPISTRELLO



code: **620/J/BI**

DESIGN **GAE AULENTI** 2013



MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO. COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS

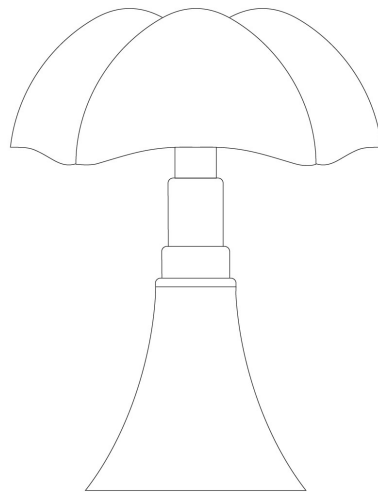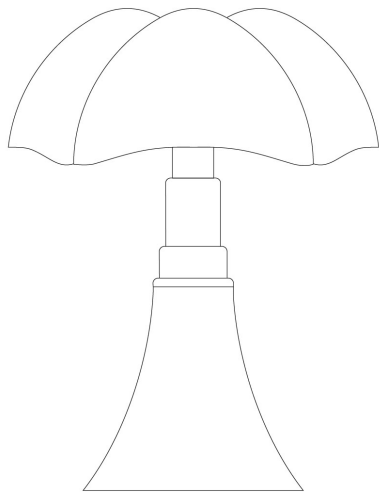

UTILIZATION: INTERNAL

TPOLOGY: TABLE LAMPS



COLOURS STRUCTURE:
DIFFUSER:

WHITE
WHITE

MATERIALS STRUCTURE:
DIFFUSER:

STAINLESS STEEL
OPAL WHITE METHACRYLATE

MEASURES WIDTH: -
HEIGHT: **35 cm**
LENGTH: -
DEPTH: -

DIAMETER: **27 cm**
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: **2,5**
GROSS: **4**

PACKAGING VOL.M³: **0.33X0.33X0.62**

NUMBER OF ITEMS: **1**

BULBS

LED 1X7W
FLUX: 700LM
KELVIN: 2700°
CLASS: A++
CRI: -
COLOR TOLERANCE: -
DURATION: -



DEVICE SPECIFICATIONS

TYPE OF EMISSION: **DIFFUSED**
POWER: **9 W**
FLOW LAMP: **374 lm**
BEAM ANGLE: -
DEVICE EFFICIENCY: **41.6lm/W**
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: **35+150cm**
LENGTH OF HANGING CABLE: -
SUPPLY: **INCLUDED**
POWER SUPPLY ASSEMBLY: **EXTERNAL**
TYPE OF DIMMING: -
VOLTAGE: **230 V**

POWER SUPPLY: **ELECTRONIC DRIVER ON THE PLUG**

CERTIFICATIONS



MARKETS




THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE, USA & CANADA

MINIPISTRELLO


code: *620/J/BI*

DESIGN **GAE AULENTI** 2013

TECHNICAL DRAWINGS

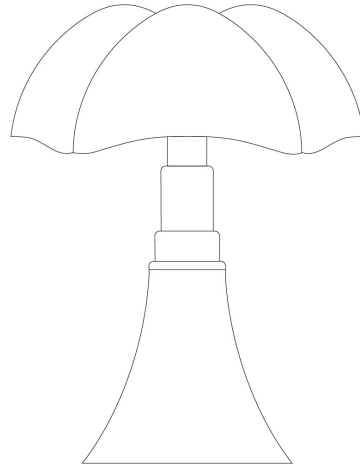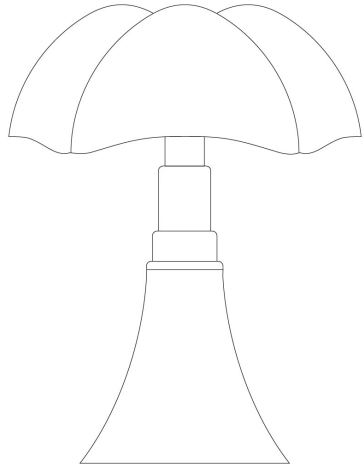

C-Halplanes
180.0 — 0.0
270.0 — 90.0
Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical

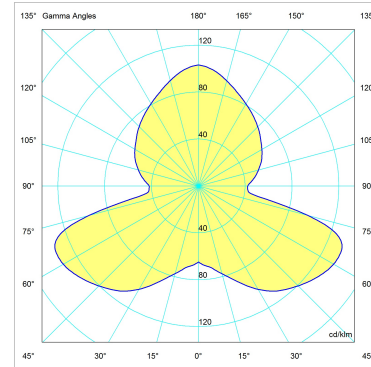

MINIPISTRELLO

code: *620/J/BI*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

